


FRAME IV




FRAME IV • HIT 35W / 50W / 70W • G12

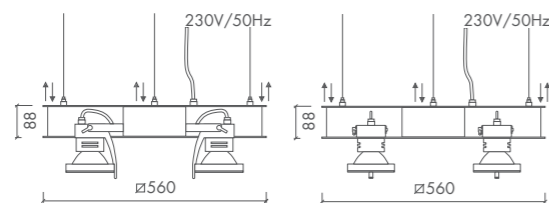

10° 30° 45°	P299	GEAR E	FIX 4I-4J	UV	
	9016 TEX 9006 TEX	11.4 KG	F	0.8 m	IP 20

- Gold-coated reflector available
- Standard with safety glass

FRAME IV • HST-TG 50W / 100W • GX12-1

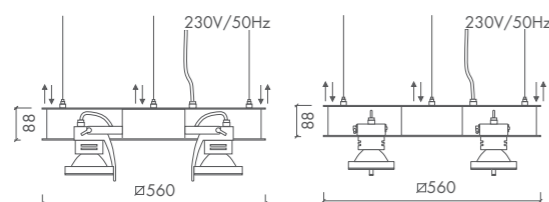

15° 35° 50°	P299	GEAR E	FIX 4I-4J	UV	P
	9016 TEX 9006 TEX	11.2 KG	F	0.8 m	IP 20


- Gold-coated reflector available




FIX I





FIX 4I

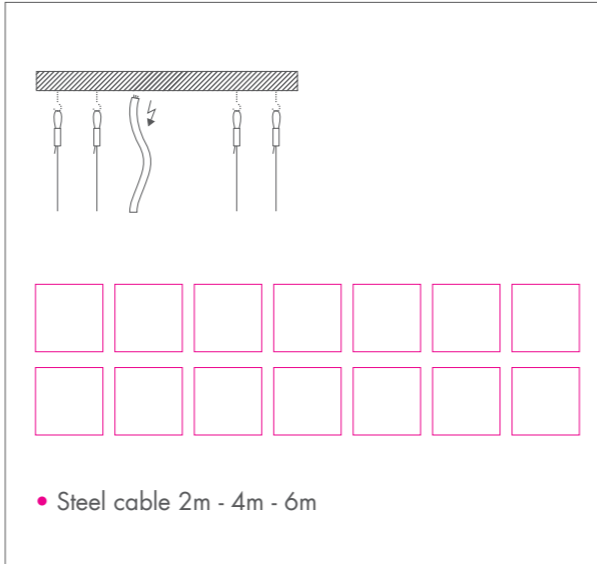

FIX I

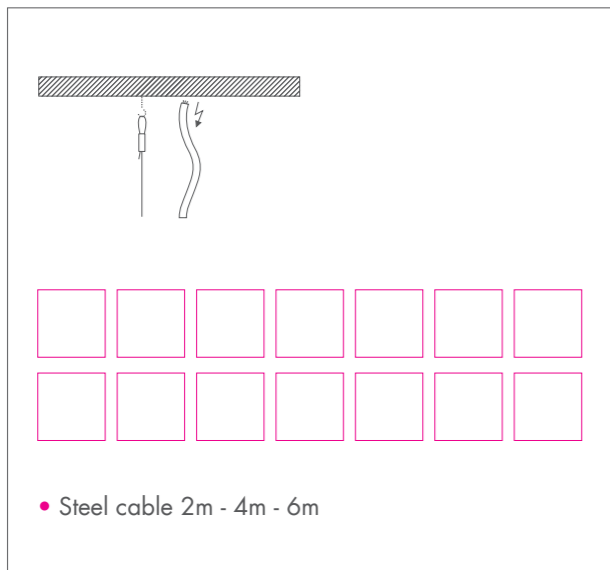


FIX 2I

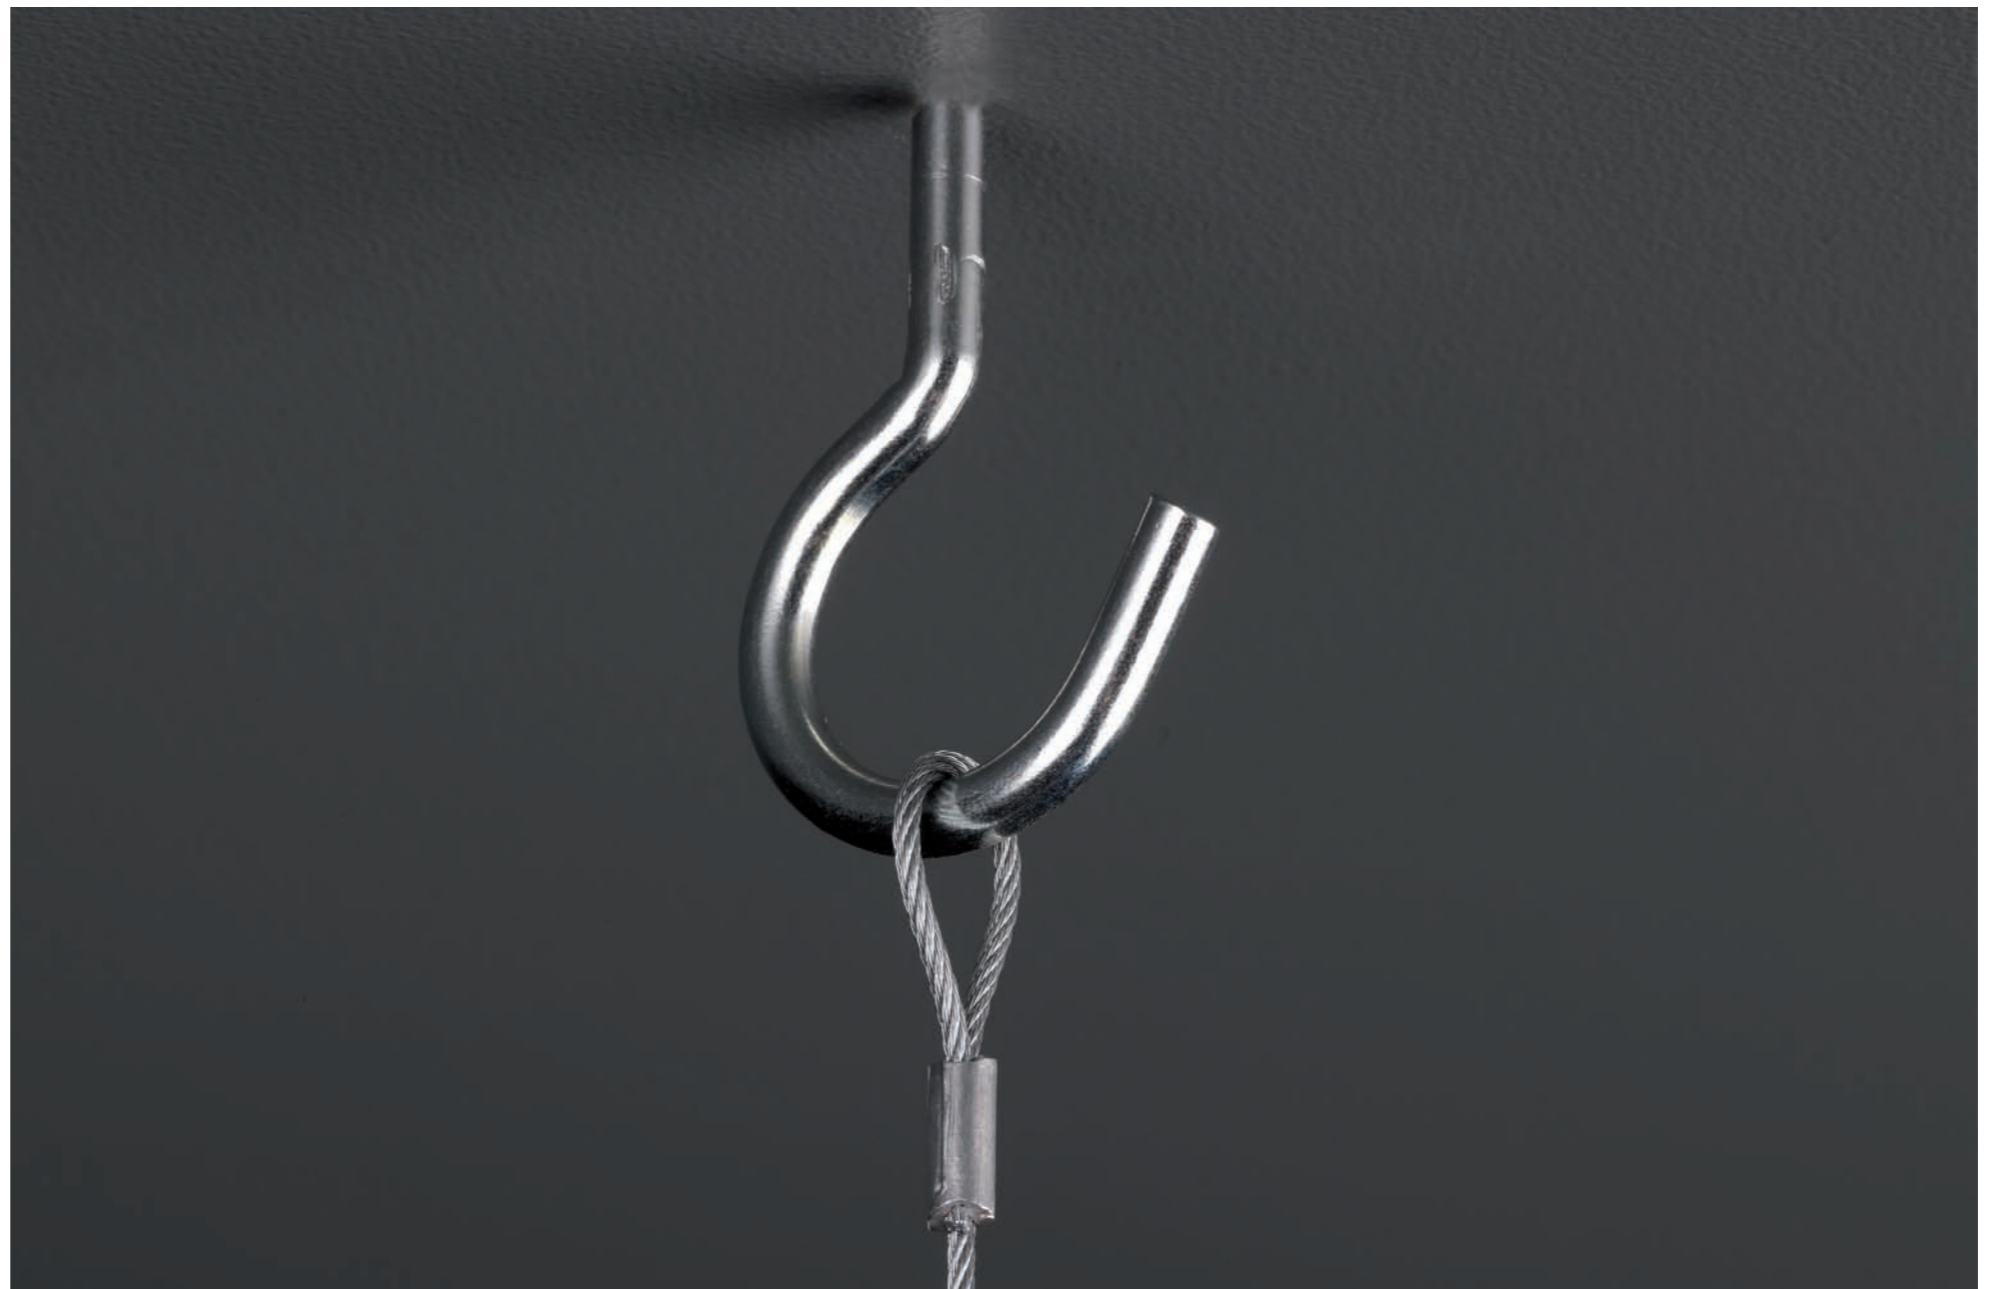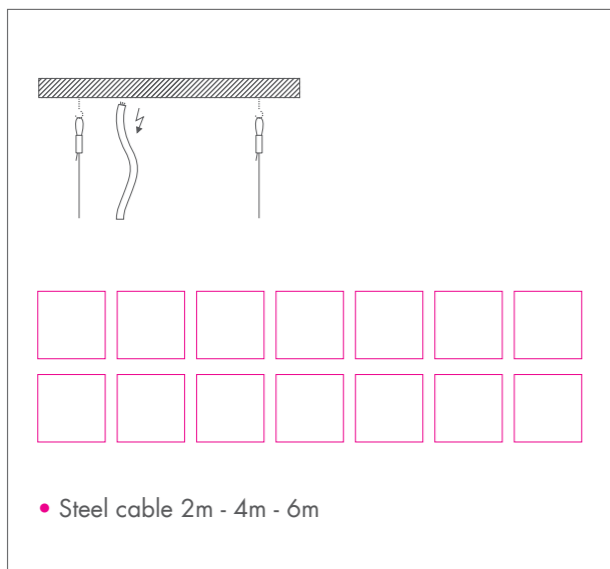


FIX J



FIX 4J

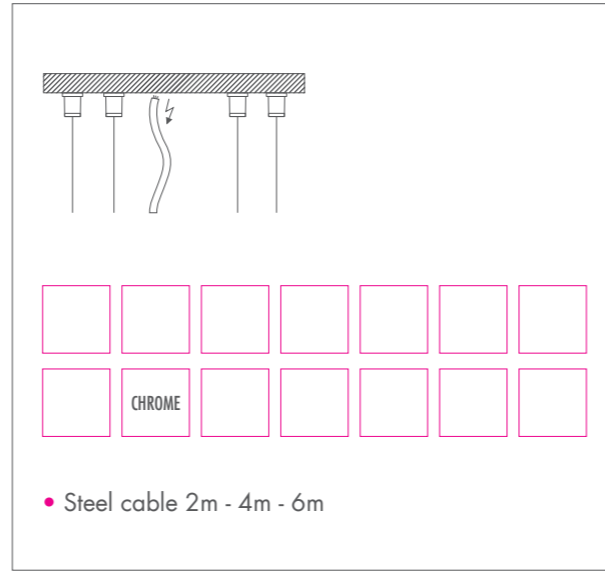

FIX J

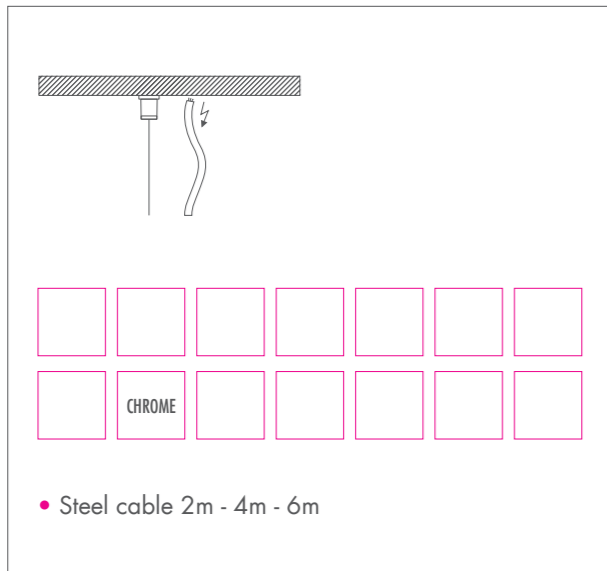

FIX 2J

